

item number	thickness of metal sheet (mm)	A (mm)	B (mm)	C (mm)	weight (kg/pc)	min. amount of bolts for connection
INOXSK 60_IX	1,2	53	25	155	0,15	4
INOXSK 110_IX	1,2	103	50	200	0,36	8

product description: The hinged joint is used to create bends of any angle in cable trays running through cable ladders.

The coupling is supplied by 1 piece; must be used 2 pieces for installation. The couplings to be used on the right or left side do not differ.

The connection is performed using the bolts NIXSM 6X10.



To protect the cables, the bolt head is inside the cable ladder.

material: IX - stainless steel AISI 304
(AISI 316, AISI 316L only to order)

sales amount: á 1 pc

meets the requirements: ČSN EN 61537

storage: ČSN EN 60721-3-1

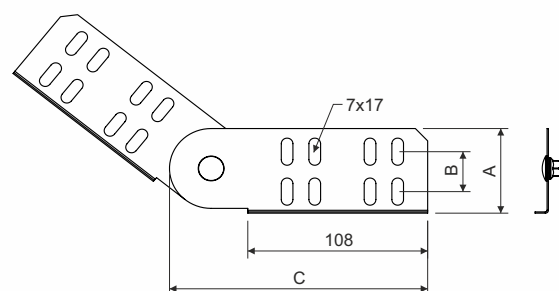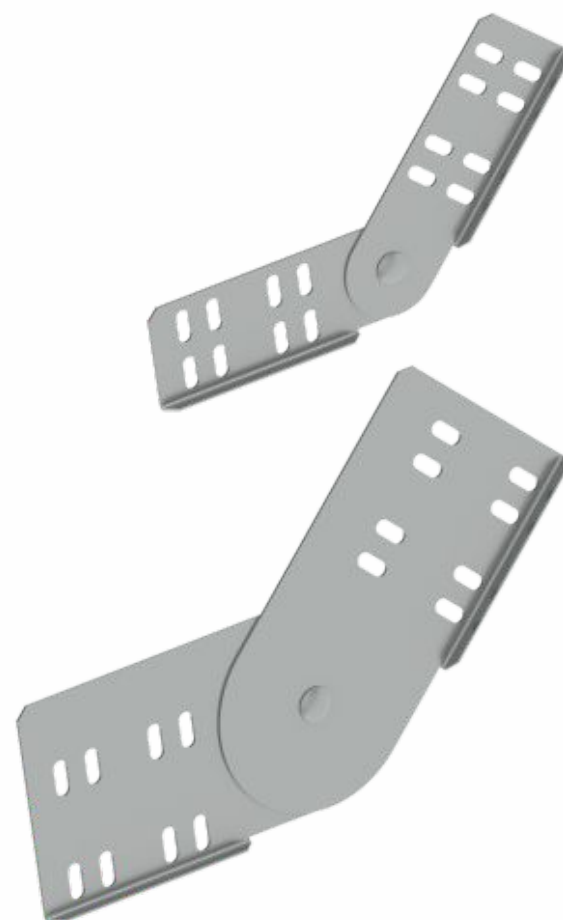

 WARNING**Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



INOXSK